



**Aquasonic®**

UNDERWATER LOUDSPEAKERS

# *Installation Guide*

Diluvio™ Underwater Loudspeaker


Installed in a Jandy Face Ring



# DILUVIO™ INSTALL- JANDY FACE RING



- ① Carefully place the Jandy face ring (chrome side down) on a non-abrasive surface. Loosen the screws until the retaining ring can be removed (see Photo #1 below). Remove the speaker from its box and place the sound lens on the Jandy face ring (#2). Carefully spread the Jandy retaining ring so it can go around the speaker's connecting stud (#3). Evenly align the retaining ring on the speaker.

CAUTION: Overspreading the retaining ring may break the ring.

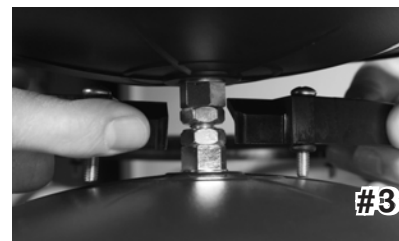

- ② Once aligned, tighten the screws in the retaining ring until they are secure (#4). Do not overtighten. Take the end of the speaker wire and pull it through the conduit hole in the back of the niche using a wire puller (#5). Leave 10 to 12 ft. of speaker wire in the niche to allow for easier access during future servicing of the speaker (#6). Place the speaker inside the light niche (#7).


Note: In actual applications, the niche will already be mounted in the wall of the pool.

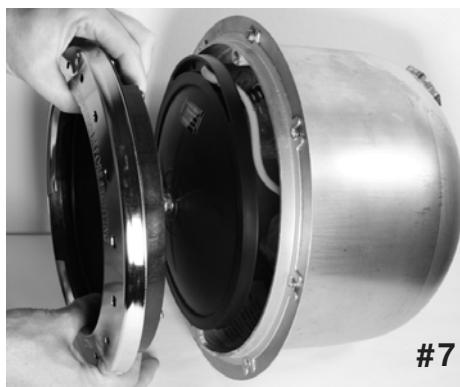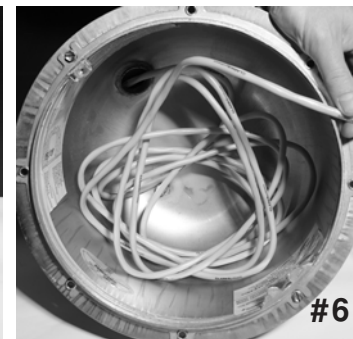

**Aquasonic**

# DILUVIO™ INSTALL- JANDY FACE RING

- ③ While inserting the speaker, carefully set the lock tab located on the bottom of the face ring behind the receiving plate located on the bottom of the niche (#8). Align the screw/rubber washer on the face ring with the threaded receiving hole on the niche (#9). Attach the trim ring securely to the niche by gently tightening the screw (#10). You are now ready to connect the speaker to your audio system.

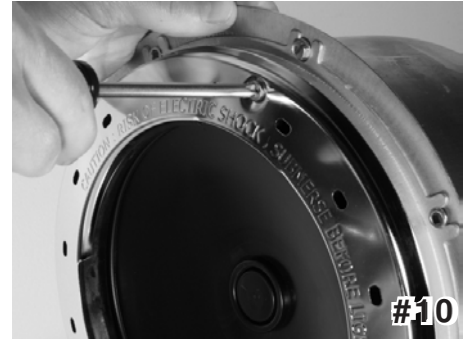

**Aquasonic**

UNDERWATER LOUDSPEAKERS