










# ISOLATION TRANSFORMER INSTALLATION GUIDE




		
<p>1. Place the Isolation Transformer in a dry, indoor, location. The transformer is not designed to be mounted outdoors.</p>	<p>2. Transformer may be mounted to a wall using mounting tabs. (The transformer is heavy and must be securely mounted to the wall.)</p>	<p>3. Locate the Speakon connector. Remove the connector from the bag.</p>
		
<p>4. Locate the speaker cable from the amplifier. Remove .75 in. (20 mm) of the cable's outer jacket.</p>	<p>5. Remove .3 in. (8 mm) of insulation from each wire.</p>	<p>6. Place the Speakon connector's blue bushing on the amplifier cable.</p>
		
<p>7. Insert the positive wire (usually white or red) to the 1+ terminal, and the negative wire (usually black) to the 1- connection. Tighten the 1+ and 1- screws.</p>	<p>8. Push the gray ring down until it locks on the connector's body.</p>	<p>9. Screw the blue bushing onto the connector's body. The connector is now assembled.</p>

# ISOLATION TRANSFORMER INSTALLATION GUIDE


**Aquasonic™**

UNDERWATER LOUDSPEAKERS

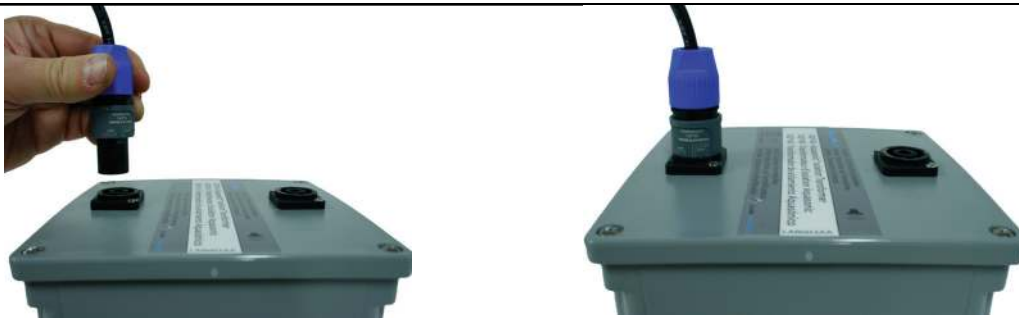

10. Plug the amplifier cable connector into the transformer input. Make sure to turn the connector until it locks in place.

11. Repeat steps 3 - 9 to attach the Speakon connector to the Diluvio Speaker cable. Connect the positive wire (white) to the 1+ connection, and the negative wire (black) to the 1- connection.

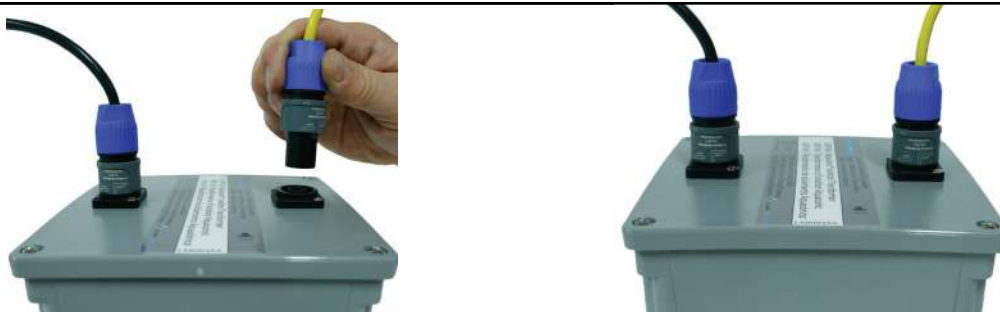

12. Plug the Diluvio Speaker cable connector into the transformer output. Make sure to turn the connector until it locks in place.