


Wiring 4 AQ339 Diluvio™ Underwater Loudspeakers and Isolation Transformers to the Amplifier

Clark Synthesis recommends an amplifier rated 500-600 Watts per channel at 4 Ohms
(Pay Attention to the 4 ohms!)

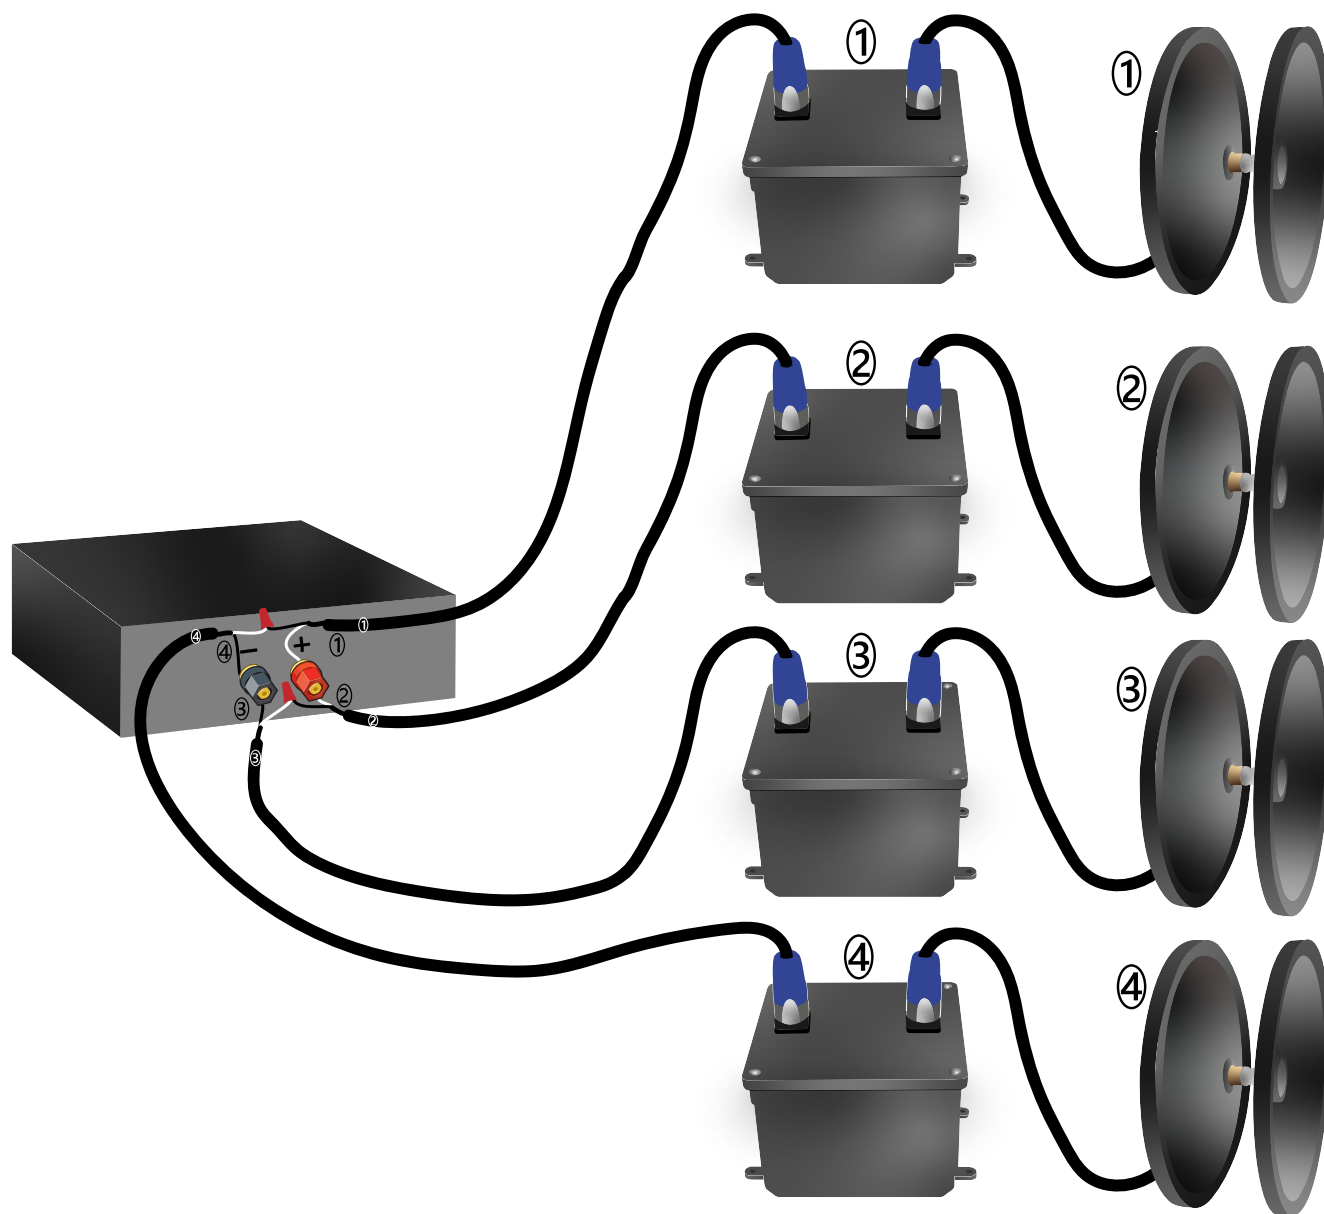

- Step 1: Place the Isolation Transformers in a Dry Location
- Step 2: Connect Speakers to Isolation Transformer Outputs
- Step 3: Connect Cables to Isolation Transformer Inputs
- Step 4: Attach Cable 1 Black Wire to Cable 4 White Wire
- Step 5: Attach Cable 2 Black Wire to Cable 3 White Wire
- Step 6: Attach Cable 1 & 2 White Wires to + Connector
- Step 7: Attach Cable 3 & 4 Black Wires to - Connector